


- 1 电器柜制箱内接线须选用CBVR型软电线, 其它未注明线径处选用CBVR-75, 1.0mm²。
- 2 电控箱、加热器及柜子本体须良好接地。
- 3 控制箱防护等级: IP44。
- 4 电源开关是T型电源直接进开关。

1. IT SHOULD CHOOSE CBVR MARINE PVC INSULATION FLEXIBLE WIRE IN THE CABINET. THE WIRE WHICH HAVE NO DIAMETER MARK IS CBVR-75,1.0mm.²
2. THE CABINET, THE HEATER AND THE BODY OF THE TANK ARE PROTECTIVE-EARTHING.
3. THE PROTECTION GRID OF THE CABINET IS IP44.
4. The power switch TO-style power supply directly into the switch

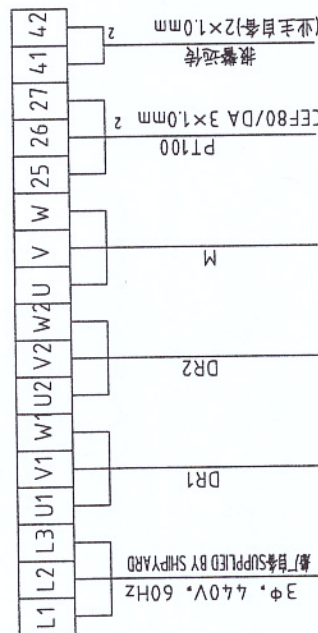

14	F	热继电器 THERMAL RELAY	1	LRD-08KN 2.5-4A	SCHNEIDER
13	KM	交流接触器 AC CONTACTOR	1	LC1-D0610M7N	SCHNEIDER
12	Q1	自动空气开关 AUTOMATIC AIR-BREAK SWITCH	1	EA9AN3D10	SCHNEIDER
11	M	水泵	1	440V60HZ 1.1KW	
10	ST	温度控制器 TEMPERATURE CONTROLLER	1	TC0-8332	附P1100
9	K	中间继电器 MIDDLE RELAY	1	MY2NJ	
8	SA2-3	转换开关 CHANGE-OVER SWITCH	2	LAY5-20XC/2	
7	SA.1	转换开关 CHANGE-OVER SWITCH	2	LAY5-20XC/3	
6	HI-7	指示灯 INDICATOR LAMP	7	AD16-22, AC220V, 1W白, 5G绿, 1Y红	
5	FU1-4	熔断器 FUSE	4	RI1-10 2A	
4	T	电液变压器 TRANSFORMER	1	CXB-63, 440V/220V	
3	KM1-2	交流接触器 AC CONTACTOR	2	LC1-D2510M	SCHNEIDER
2	Q	自动空气开关 AUTOMATIC AIR-BREAK SWITCH	1	NSC60E, 3P, 60A	SCHNEIDER
1	DR1-2	电加热器 ELECTRIC HEATER	2	440V60HZ13.5KW×2	
NO.	CODE	名称 NAME	QTY 数量	型号及规格 FORMAT	REMARKS 备注
序号	代号	名称	数量	型号及规格	备注
电气原理及外部接线图 电气原理图及外部接线图 电气原理图及外部接线图					
HYR-1A-22BYL					
电加热控制箱系列(1台泵, 2组电加热)					
泰州市航海机械有限责任公司					
TAIXING NAVIGATION MACHINERY CO., LTD.					