


TOP VIEW

18p SOCKET CONNECTOR FOR
CONNECTING AN I/O MODULE.

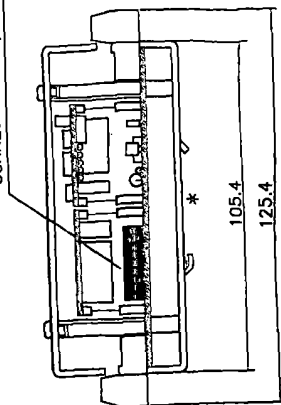


* DIN RAIL MOUNTING (TS 35)

BOTTOM VIEW

DETACHABLE TERMINAL STRIP
(WIRING FROM SIDE)


18p MALE HEADER FOR CONNECTING
ON A PREVIOUS I/O PROCESSOR OR I/O BOARD.

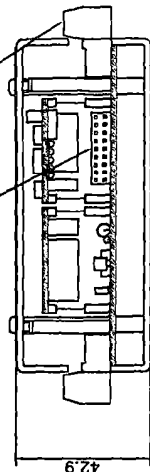

FRONT VIEW


INSERTION
TEXT SHEET

LED INDICATORS

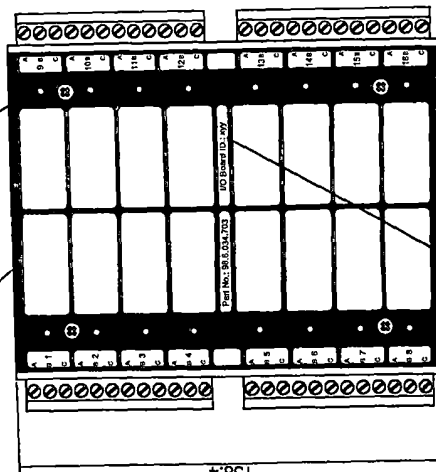


'x' = FIELD BUS No.
'y' = BOARD No.

SIDE VIEW

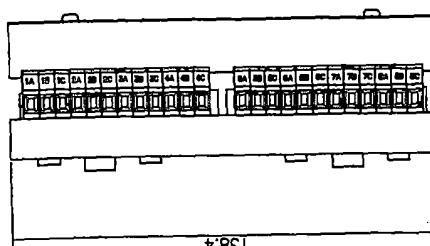

NOTE:
TEXT LABEL CAN BE PRINTED ON
STANDARD DESKJET AND LASER PRINTERS
(PLAIN PAPER)



6034-DIN-16MIO MIXED I/O BOARD
MOUNTING & DIMENSIONS

FILE 6034-DIN-16MIO MIXED I/O BOARD
MOUNTING & DIMENSIONS

POWER CONSUMPTION
MAX 1.5W
TYP 1.0W
MIN 0.5W

REVISION
DATE
BY
CHKD

POWER CONSUMPTION : 9W