

Datasheet

rotor nl®

rotor B.V.

Mors 1-5, 7151 MX Eibergen NL
www.rotor.nl tel.: +31 545 464640
sales@rotor.nl tel.: +31 545 464646

Model No. 4-Pole cage motor 5RN 225S 37kW D400V 50Hz IM3021-FF400

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	37	49,6	68	1475	239	IE1	92,1 92,3 91,7	0,85 0,81 0,81	6,99	2,34	3,05
690	Y				39,5								
460	D	60	42,5	56,97	67	1775	228	N/A	92,9 93,0 92,0	0,86 0,82 0,72	7,27	2,45	3,00

Motor type	5RN225S04A0
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	225S
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	37 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. B (80K)
Temperature rise winding	83 K
Temperature rise surface	25 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6313/C3
Lubrication method	22gr/10200hrs
Type of grease	Unirex N3

Phase resistance at 20°C	0,2224 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	234%	698%	213%	305%	26 A
@ D 460V 60Hz	245%	726%	209%	300%	23,8 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1


Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

Degree of protection	IP55
Mounting type	IM3021-FF400
Cooling method	IC411
Motor weight - approx.	280 kg
Gross weight - approx.	290 kg
Motor inertia	0,4100 kgm ²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	0 dB(A)

Direction of rotation	cw /ccw
-----------------------	---------

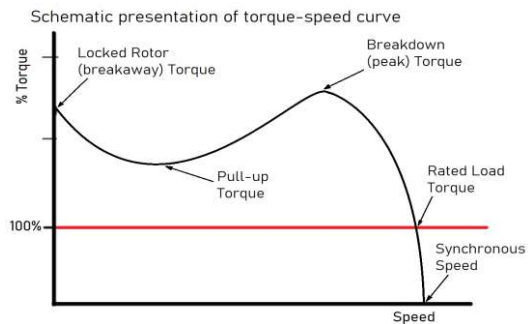

This is an uncontrolled copy, data can be changed anytime.

RegalRexnord